

## DS-UPS18D-Z DC UPS



- Power multiple devices with abundant DC output ports
- Wide input voltage range
- 8000mAh high-capacity battery
- Flame retardant housing



## ▪ Specification

Model		DS-UPS18D-Z
Input	Input Voltage Range	100 VAC to 240 VAC
	Input Frequency	50/60 Hz self-adaptive
Output	Outlet Type	USB, DC and PoE ports
	Output Power & current (in common)	USB Port: 5 Vdc, 2 A DC Port 1: 5 Vdc, 2 A DC Port 2: 9 Vdc, 1 A DC Port 3: 12 Vdc, 1 A PoE Port: 15 Vdc, 0.8 A / 24 Vdc, 0.5A
Battery	Battery Type	Lithium Battery
	Recharge Time	2000 mAh * 4
	QTY. & capacity of battery	Typical 2-3 hours
Protection	Full Protection	LED indicator Working Mode (AC Mode): Solid green Battery Mode (DC Mode): Solid red Overloading Mode: Flashing yellow
Indicator	Display	Over-charge & Over-discharge protection, Short-circuit protection, Overload protection
General	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F )
	Operating Humidity	20% to 90% (non-condensing)
	Dimension	160*105*28 mm
	Weight	0.4 kg

## ▪ Available Model

DS-UPS18D-Z

## ▪ Dimension

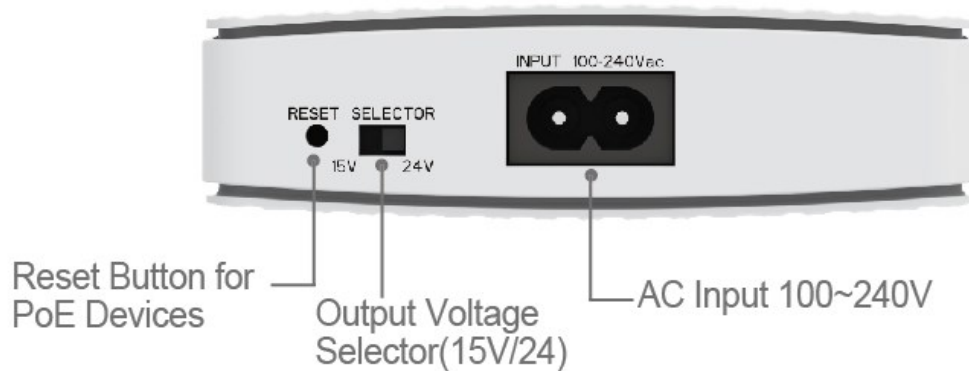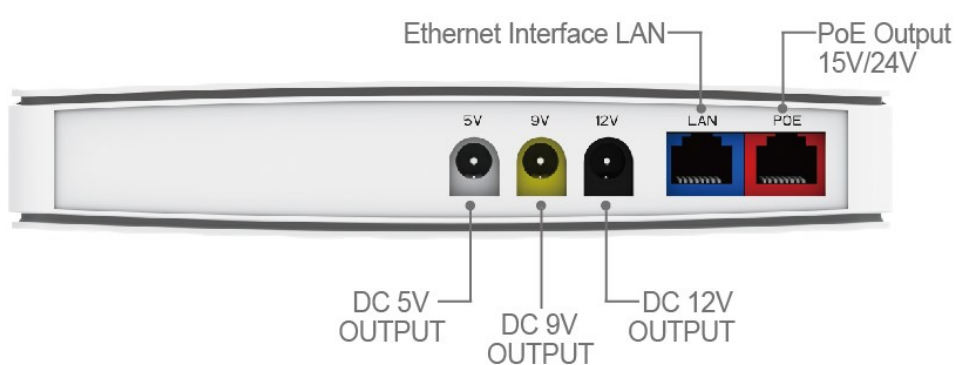

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

